



# **AEROSPACE SYSTEMS**

AVIONICS • HANGARS • MAINTENANCE



INNOVATIVE PROTECTIVE COATINGS



# AVIONICS

## SIMFLOOR ESD ELECTROSTATIC DISSIPATIVE FLOORING

**SIMIRON SIMFLOOR ESD** has a static dissipative topcoat that helps to protect small, sensitive computer circuitry used in aircraft electronic components. The system provides a valuable foundation for any comprehensive static charge management solution. The coating system will also provide protection against airplane fluids and fuel and resists damage from abrasion and UV exposure from large access doors.

### SYSTEM ATTRIBUTES



**ADHESION:**  
> 400 psi



**COEFFICIENT OF FRICTION:**  
0.60



**COMPRESSIVE STRENGTH:**  
11,600 psi



**FLAMMABILITY:**  
Self-extinguishing on concrete



**FLEXIBILITY 1/8" BEND MANDREL:**  
PASS



**FLEXURAL STRENGTH:**  
12,800 psi



**HARDNESS:**  
Pencil 4H



**GLOSS:**  
70 - 80



**RESISTANCE:**  
1x10 (6th power) -  
< 1x10 (9th power) ohms



**TABER ABRASION:**  
12 mg loss




**TENSILE STRENGTH:**  
9,600 psi



**UV RESISTANT**

### SYSTEM BUILD

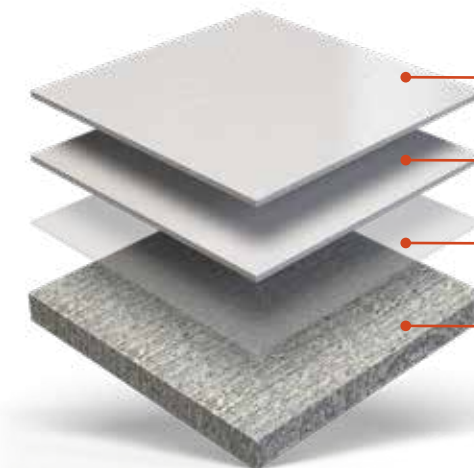


**TOPCOAT:**  
SIMFLOOR ESD, SATIN, LIGHT GRAY

**BASECOAT:**  
1100SL 100% SOLIDS EPOXY, LIGHT GRAY

**PRIMER:**  
1000HS OR ANY SIMIRON EPOXY PRIMER, CLEAR

**PREPARED SUBSTRATE:**  
CSP 3+

### COLOR SELECTIONS



To view all color selections refer to the **Simiron Product Color Guide**.

# HANGARS

## SIMFLOOR HWU HIGH-WEAR URETHANE

Aircraft owners want a functional coating that looks good while not taking attention away from their planes. **SIMIRON SIMFLOOR HWU** is a system that provides protection against corrosive airplane fluids and UV damage from exposure through large entry doors. The satin finish contains a fine texture that provides extreme abrasion resistance to withstand heavy aircraft movement and parking.

### SYSTEM ATTRIBUTES



**ADHESION:**  
> 400 psi



**COEFFICIENT OF FRICTION:**  
0.60



**COMPRESSIVE STRENGTH:**  
11,600 psi



**FLAMMABILITY:**  
Self-extinguishing on concrete



**FLEXIBILITY 1/8" BEND MANDREL:**  
PASS



**FLEXURAL STRENGTH:**  
12,800 psi



**GLOSS:**  
70 - 80



**HARDNESS:**  
Pencil 4H



**TABER ABRASION:**  
12 mg loss




**TENSILE STRENGTH:**  
9,600 psi



**UV RESISTANT**

### SYSTEM BUILD

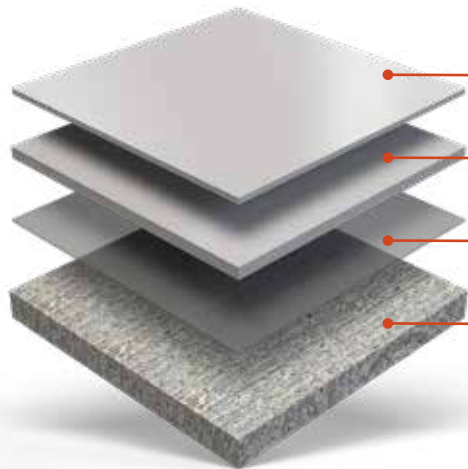

**TOPCOAT:**  
SIMFLOOR HWU, SATIN, LIGHT GRAY


**BASECOAT:**  
1100SL 100% SOLIDS EPOXY, LIGHT GRAY

**PRIMER:**  
1000HS OR ANY SIMIRON EPOXY PRIMER, CLEAR

**PREPARED SUBSTRATE:**  
CSP 3+

### COLOR SELECTIONS

To view all color selections refer to the [Simiron Product Color Guide](#).



## SIMFLOOR HWU HIGH-WEAR URETHANE

Even the best mechanics spill a small amount of corrosive hydraulic fluid or gas and end up with parts and tools on the floor. **SIMIRON SIMFLOOR HWU** is a durable system that uses a high-solids, low VOC urethane topcoat that provides superior resistance against abrasion, chemicals, and UV exposure. Light color options also provide light reflectivity for critical work; small tools and fasteners can be easily located on this surface.

### SYSTEM ATTRIBUTES



**ADHESION:**  
> 400 psi



**COEFFICIENT OF FRICTION:**  
0.60



**COMPRESSIVE STRENGTH:**  
11,600 psi



**FLAMMABILITY:**  
Self-extinguishing on concrete



**FLEXIBILITY 1/8" BEND MANDREL:**  
PASS



**FLEXURAL STRENGTH:**  
12,800 psi



**GLOSS:**  
70 - 80



**HARDNESS:**  
Pencil 4H



**TABER ABRASION:**  
12 mg loss




**TENSILE STRENGTH:**  
9,600 psi



**UV RESISTANT**

### SYSTEM BUILD

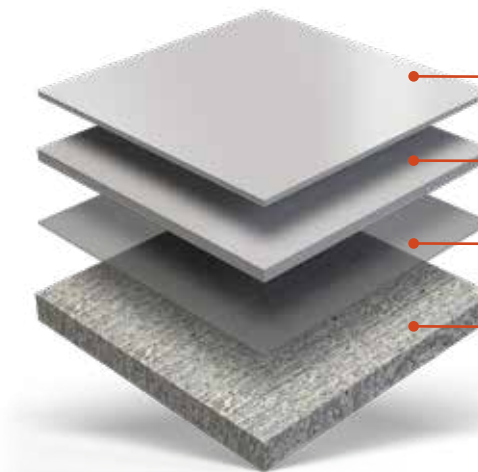

**TOPCOAT:**  
SIMFLOOR HWU, SATIN, LIGHT GRAY


**BASECOAT:**  
1100SL 100% SOLIDS EPOXY, LIGHT GRAY

**PRIMER:**  
1000HS OR ANY SIMIRON EPOXY PRIMER, CLEAR

**PREPARED SUBSTRATE:**  
CSP 3+

### COLOR SELECTIONS

To view all color selections refer to the **Simiron Product Color Guide**.





[SIMIRON.COM](http://SIMIRON.COM) | [SHOP.SIMIRON.COM](http://SHOP.SIMIRON.COM)



**SIMIRON INC.**  
**CORPORATE HEADQUARTERS**  
3000 Research Drive  
Rochester Hills, MI 48309  
(248) 686-3600

**MADE IN THE USA**

